




Terafib MTRJ SM /MM Adapter



Unit: mm

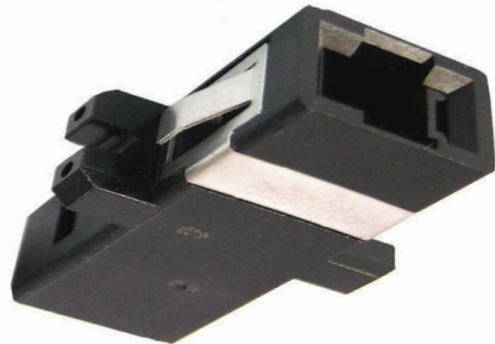

Product Information

Features

- Small size and simple structure
- Good repeatability
- High reliability and stability
- Precision zirconia ceramic sleeve
- Low insertion loss and back reflection loss
- Comply to ROHS requirement

Application

- Telecommunication Network
- FTTX, FTTH
- LAN, WAN, CATV
- Fiber Telecommunication Systems
- Data Processing Networks
- Industrial & Military

Part Number	Description	MM	SM
T1MTR0715	Tera SM / MM Fiber Optic MTRJ Adapter Black	Yes	Yes

Insertion Loss	SM / $\leq 0.3\text{dB}$	MM / $\leq 0.3\text{dB}$
Return Loss	SM / $\geq 35\text{dB}$	MM / N/A
Mating Durability	$\leq 0.2\text{dB}$ Typical change / 995 Times	
Operating Temperature	-40 to +75°C	-40 ~ +85°C

New York-USA / Montréal- CANADA www.terafib.com www.terafib.ca / info@terafib.com
 PHONE: 1-800-325-5477 / 1-514-325-5477 1-315-325-5477



Terafib Rev- 07-12-2022

